

RA711 Series

Weather and Vandal Resistant Telephones Telephones



Features

- Vandal Resistant Stainless Steel
- All Weather Protection
- LED indication for Off-hook
- Auto Clear Down
- Simple Installation
- Fast-fit Terminal Connection
- Raised Buttons in line with DDA Directives
- Various Mounting Options
- Full Keypad, Single, Two or Three Button Auto-dial Options
- Fully Programmable
- Non-volatile Memory
- Line Powered
- REN-1 Rating





The Vandal Resist Telephones are based on a stainless steel faceplate and provide clear hands-free, loud-speaking operation. Manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times. The Vandal Resist Telephone has been designed to meet the needs of clients who experience loss through vandalism. However, the telephone is extremely simple to install and offers a convenient solution to a range of telephone siting problems in all locations.

The RA711 is available with various keypad configurations; including Full Keypad, Single, Two and Three button auto-dial options. The RA711 is easy to program and has a non-volatile memory to ensure stored numbers are not lost when line power is disconnected. Additionally the entire range offers a timed or auto-clear down function, preventing an off-hook or 'hung' condition. Available for many applications the RA711 is a versatile reliable product for security and emergency voice communications. Ideal for prisons, courthouses, rail platforms, car parks, police stations, hospitals, outside buildings, gate entry etc.

Technical Specifications

Speech/Network Interface	Voice switched (VOX) semi duplex operation. EN 301 437 V1.1.1 (manufactured to TBR21/TBR38).
Ringing	Through internal speaker, REN 1.3 selectable tones.
Power Supply	Line powered down to 15 mA. Optional special model, with 9 V power supply to give increased volume.
Call Cleardown	Adjustable timer from 1 to 10 minutes or off. Auto cleardown function on tone detection from the line.
Operating Temperature	- 30°C to + 65°C
Storage Temperature	- 40°C to + 80°C
Relative Humidity	Up to 95% non condensing
Keypad	Heavy duty metal keypad and buttons, vandal resistant
Material	Robust high grade Stainless Steel
Programming	Using on board keypad and externally connected security keypad
Weight	1.8 kg
Safety	Manufactured to BS EN 60950 Low Voltage directive 73/23/EEC modified by Directive 93/68/EEC CE Marking EMC Directive - 89/336/EEC amended by Directive 91/263/EEC, Directive 92/31/EEC and Directive 93/68/EEC ETSI ES 203 021-V2.1.2 ITU-T K21 (Resistibility of telecommunications equipment installed at customers premises to over-voltages and over current) NR/E/S30003 The performance of telecommunications equipment under conditions of electrical interference EN50121-4:2000 Railway applications - Electromagnetic compatibility
Protection	Dust and liquids to IP55 dependent on installation

Dimensions

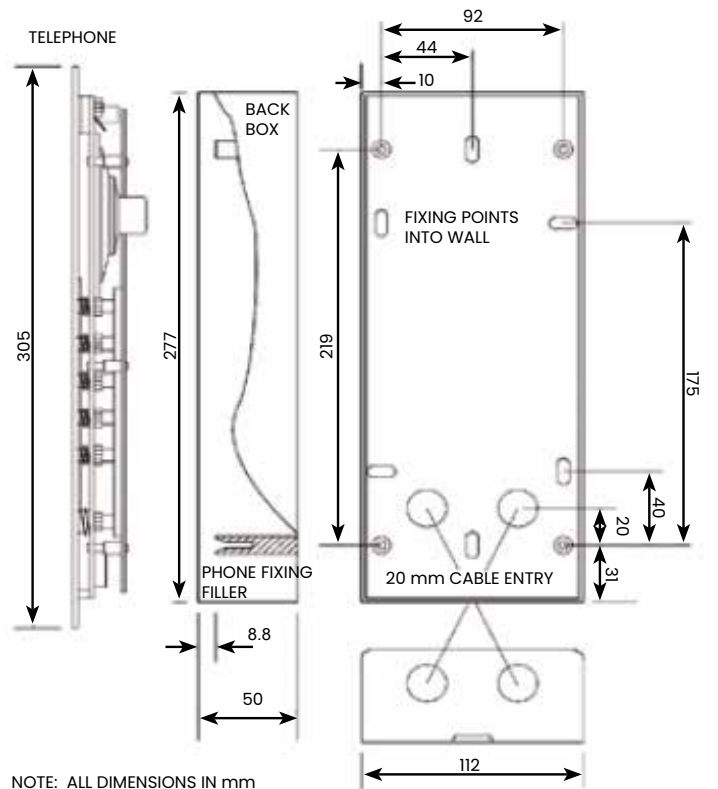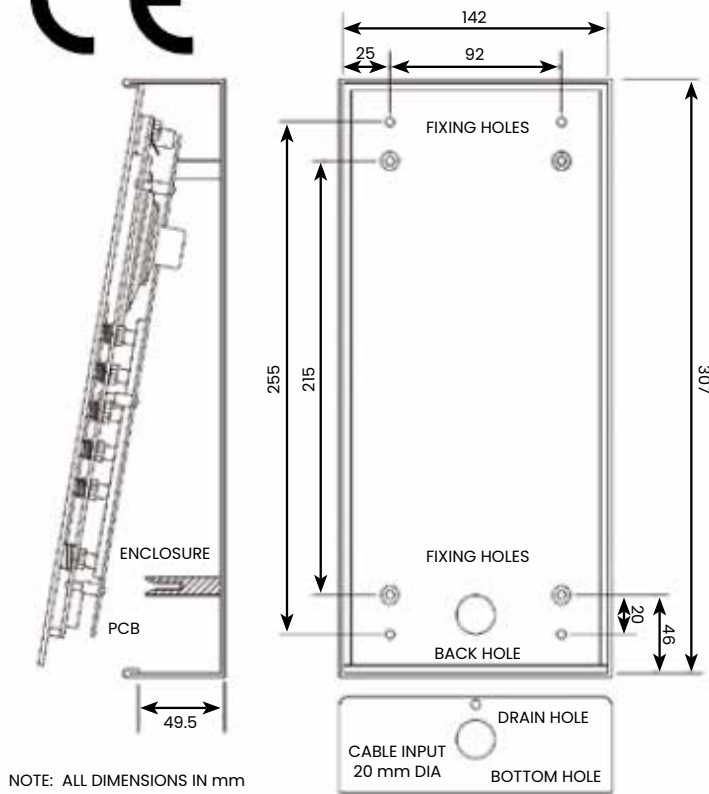

September 2018

All specifications are subject to change without notice
The information contained herein is for reference only and does not constitute a warranty of performance

Partnered Supplier



sales@eylex.com.au
www.eylex.com.au

