

## TM210 Series

4.8 – 15 m telescopic aluminium mast kit, motorised  
**Tactical Masts: Telescopic Motorised**



### Overview

Comrod's new generation of self-supporting telescopic masts incorporate an electrical drive for high speed extension/retraction. The mast fits most vehicular and shelter platforms, and supports applications ranging from radio link communications to unmanned radar systems for border surveillance. The system allows for rapid deployment and reduced vulnerability. The optional computer control system enables an operator to raise and lower the mast from a remote location.

- Automatic operation using wired or optional wireless remote control; manual emergency operation using hand crank
- Optional computer control (patent pending) over CAN bus DS402
- Ruggedised design for use in extreme environments
- Positive retraction option for deployment slopes up to 15°
- 220 VAC or 28 VDC drive system
- Customer specified extended/retracted heights available
- Optional cable management system for top load
- Standard and customised top load mounting interfaces

The mast is made of extruded hexagonal aluminium alloy tubes of progressively smaller size and tracked telescopic action, with fittings in stainless steel. The hexagonal sections move inside each other on plastic guide-ways which ensures excellent torsional resistance. The mast is elevated by an electric motor connected to a ball-screw that lifts section 2. The other sections are hoisted by steel cables. The mast is fully self supporting and requires no additional staving, however the addition of top guys will further increase the mast performance. In the event of power failure the mast can be manually deployed/retracted.

**TM210 series masts are fully qualified to MIL-STD-810G**





Mast Type	TM 210/4.8-1.1	TM 210/10-1.95	TM 210/15-2.7
Elevated Height	4.8 m	10 m	15 m
Retracted Height	1.1 m	1.95 m	2.7 m
Max. Payload Area *	0.7 m <sup>2</sup>	0.5 m <sup>2</sup>	0.3 m <sup>2</sup>
Number of Sections	7	7	7
Wind Speed Operational	25m/s	21m/s	18m/s
Wind Speed Survival	33m/s	30m/s	25m/s
Max Vertical Payload *	148 kg	148 kg	100 kg
Mast Weight	85 kg	110 kg	138 kg
Elevation Time	30 sec	55 sec	80 sec
Retraction Time	23 sec	40 sec	60 sec
Voltage	220 VAC or 28 VDC	220 VAC or 28 VDC	220 VAC or 28 VDC
Power Consumption	600 W	600 W	600 W

\* Typical values shown. Actual values will be subject to a combination of top load weight, top load area and pointing accuracy required.




Fully deployed un-guyed mast

The hexagonal sections move inside each other on plastic guideways which provide the masts with excellent stability and torsional resistance.

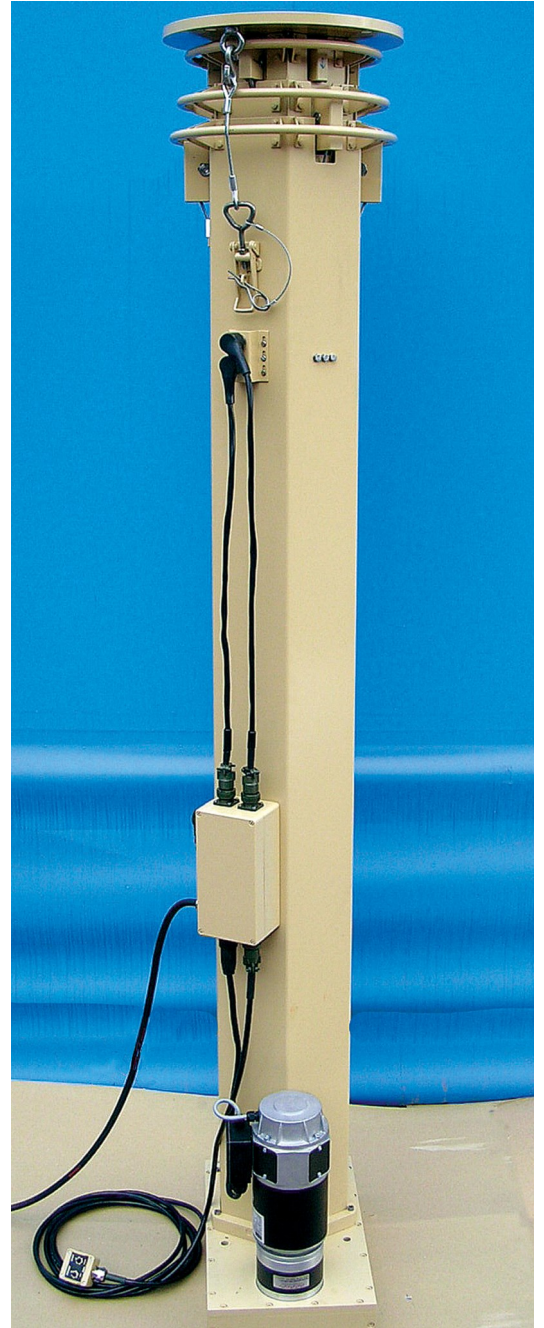

Mast in retracted position

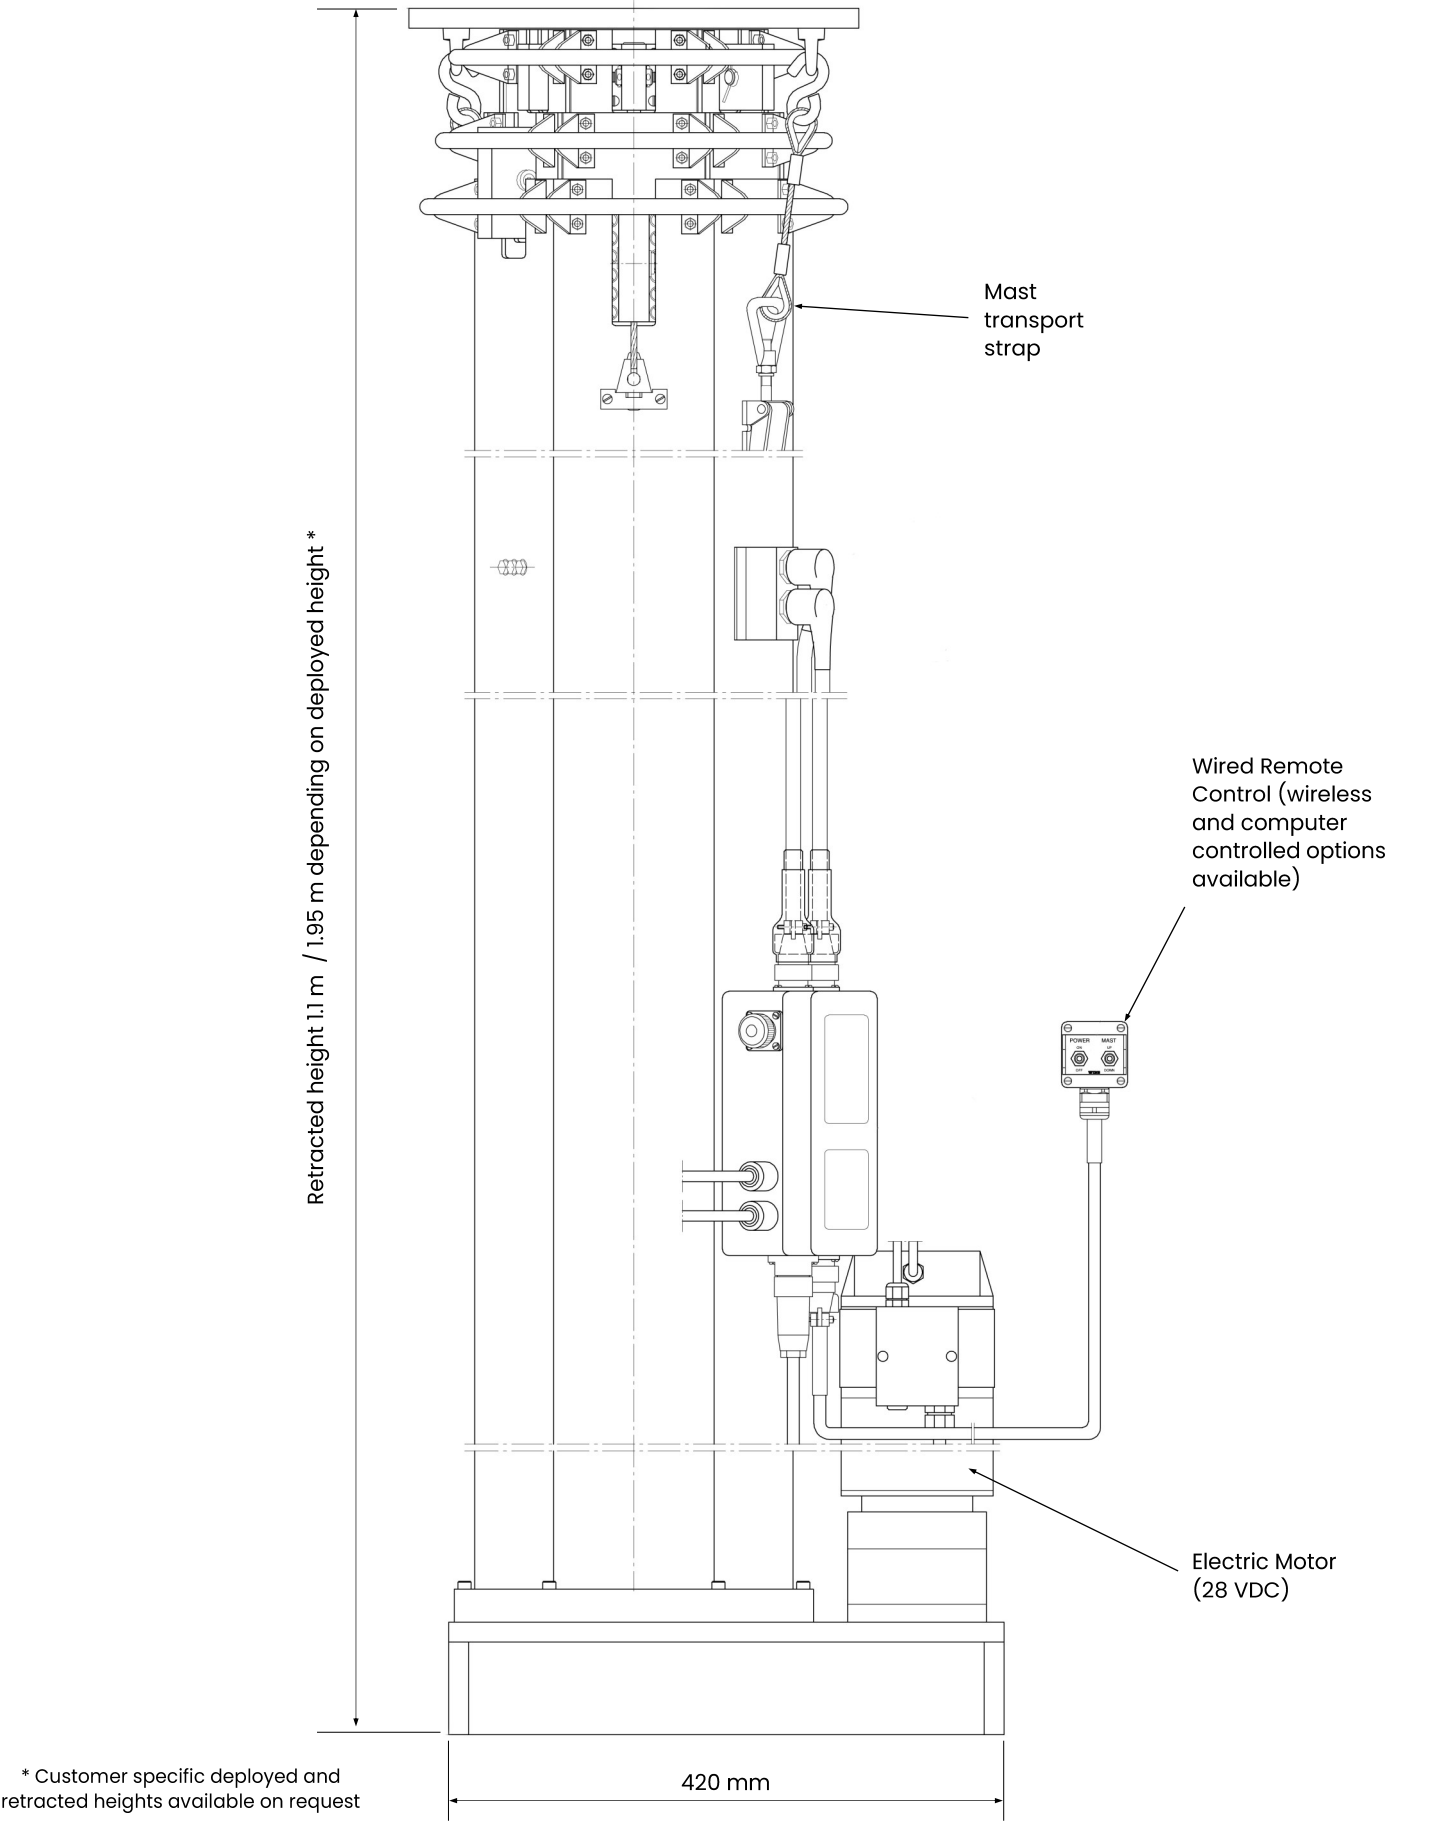

September 2018

All specifications are subject to change without notice  
The information contained herein is for reference only and does not constitute a warranty of performance

Partnered Supplier



[sales@eylex.com.au](mailto:sales@eylex.com.au)  
[www.eylex.com.au](http://www.eylex.com.au)

