


## VHF30512DB-HG

VHF/UHF vehicle whip, high gain, monopole/dipole, 2.38 m,  
30-88 MHz, 225-512 MHz

### Tactical Antennas: Vehicle Mount

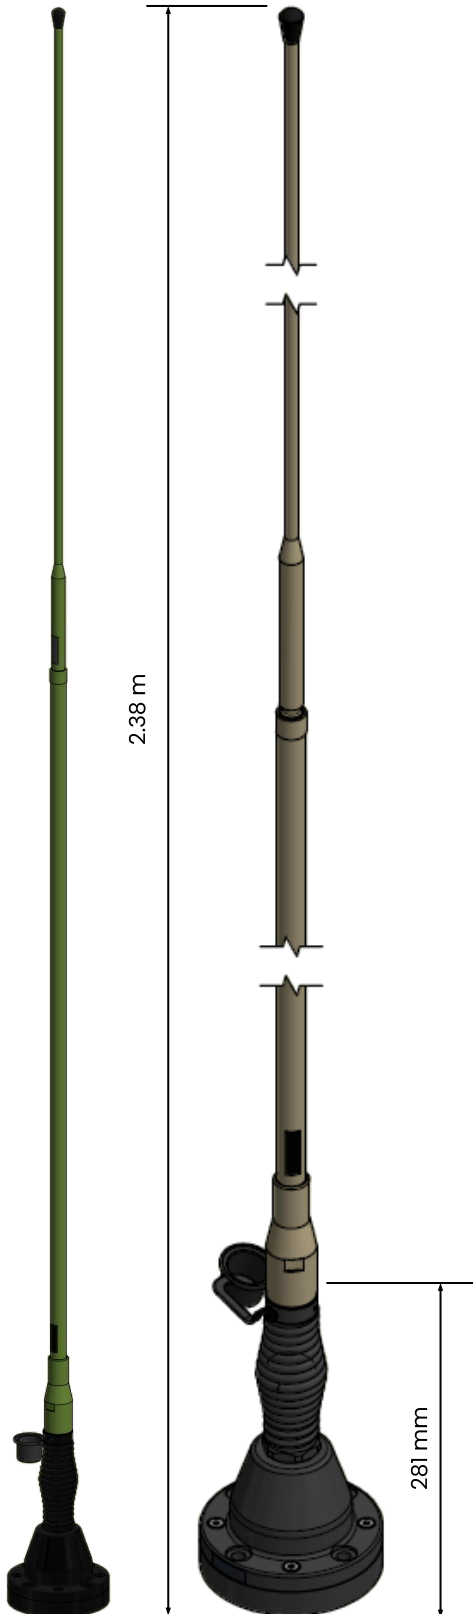

### Application

The VHF30512DB-HG is a tactical dual band vehicle antenna designed for use on all modern in-service military platforms, including armoured or soft skin, metal chassis or composite, wheeled or tracked.

The antenna operates over the 30-88 MHz and 225-512 MHz frequency bands. The antenna is designed as a monopole in the VHF band, with performance similar to an end-fed VHF only antenna. The UHF part is a high gain dipole.

Bases are available to suit different mounting configurations with optional L1 and L1/L2 GPS.


### Electrical Specifications

<b>Frequency Range</b>	30-88 MHz, 225-512 MHz
<b>VSWR</b>	< 3.5
<b>Nominal Impedance</b>	50 $\Omega$
<b>Power Rating</b>	VHF 100 W UHF 50 W
<b>Gain</b>	See diagrams
<b>Isolation</b>	< -40 dB (VHF/UHF)
<b>Radiation Pattern</b>	Azimuth: Omnidirectional
<b>Polarisation</b>	Vertical
<b>Connectors</b>	Dual Feed: VHF - BNC female, UHF - BNC female Single Feed: VHF/UHF - BNC female GPS SMA female (option)


### Mechanical Specifications

<b>Design</b>	Centre fed dipole for UHF. End fed whip for VHF. Radiating element completely enclosed in epoxy/fibreglass laminate. Metal parts are plated brass and stainless steel.
<b>Length</b>	Total 2.38 m
<b>Weight</b>	Complete Antenna 4 kg Base 2.8 kg Lower Whip 1 kg Upper Whip 0.25 kg
<b>Wind Rating</b>	55 m/s = 201 km/h
<b>Finish</b>	Polyurethane lacquer
<b>Colour</b>	Customer Specified
<b>Temperature Range</b>	- 55°C to + 71°C


## Gain and Isolation Plots

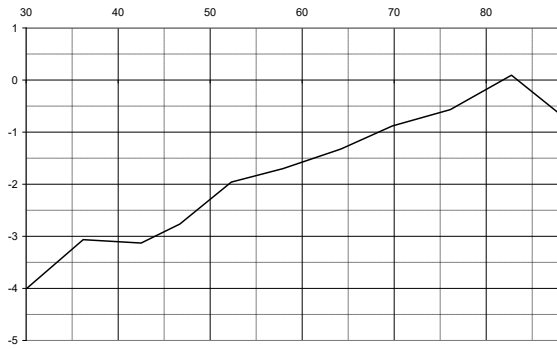

Typical VHF Gain in dB rel.  $\lambda/4$  Whips

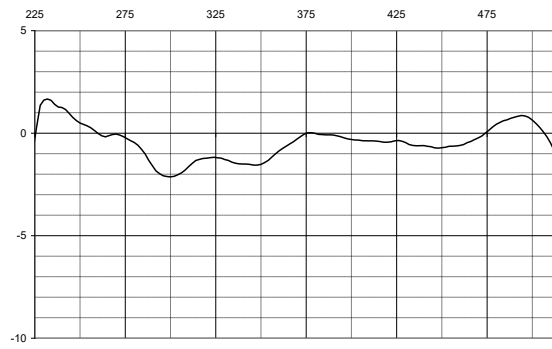

Typical UHF Gain in dBi

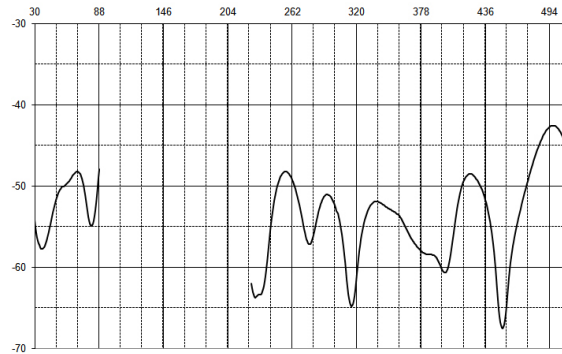

Typical Isolation between VHF/UHF Ports

## Antenna Variants

Description	Antenna Base	Feed	VHF Connector	UHF Connector	GPS Connector
Dual Band 30–512 MHz	NATO 4 Hole	Dual	BNC Female	BNC Female	
Dual Band 30–512 MHz with L1 GPS	NATO 4 Hole	Dual	BNC Female	BNC Female	SMA female
Dual Band 30–512 MHz with L1/L2 GPS	NATO 4 Hole	Dual	BNC Female	BNC Female	SMA female
Dual Band 30–512 MHz	NATO 4 Hole	Single	BNC Female		
Dual Band 30–512 MHz with L1 GPS	NATO 4 Hole	Single	BNC Female		SMA female
Dual Band 30–512 MHz with L1/L2 GPS	NATO 4 Hole	Single	BNC Female		SMA female

## GPS Electrical Specifications

	L1 GPS	L2 GPS
Frequency Band	1575.42 ± 10 MHz	1227.60 ± 10 MHz
Supply Voltage	2.7–5.5 V	2.7–5.5 V
Pre Amplifier	26.5 dB @ 5 V	26.5 dB @ 5 V
Noise Figure	2.5 dB	2.5 dB
Supply Current	< 60 mA	< 60 mA
Polarisation	RHCP	RHCP
Connector	SMA female	SMA female

February 2021

All specifications are subject to change without notice  
The information contained herein is for reference only and does not constitute a warranty of performance

Partnered Supplier



sales@eylex.com.au  
www.eylex.com.au

