


HF230XD-BF

HF broadband wire dipole antenna, balanced feed, 2 x 13 m, 2-30 MHz
Tactical Antennas: Tactical and Base Station

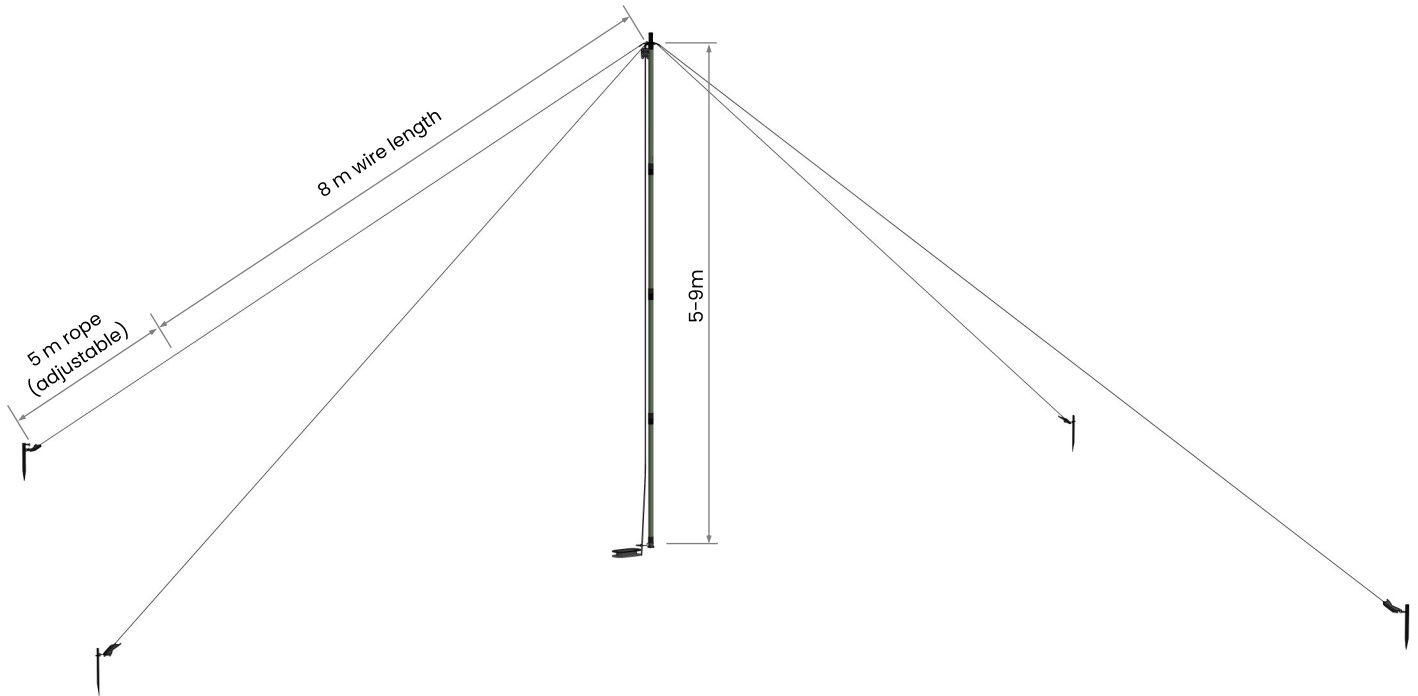

- 2-30 MHz
- 400 W CW
- Folded dipole elements with 300 ohm balanced feed
- Permits fast frequency shifting as it does not require any adjustments
- Easy to erect and dismantle
- Can be supported on any suitable 5-9 m tall non-conducting support structure
- Kit includes locking guy ring for use on Comrod AMX85 manportable support mast
- Can be combined with other Comrod elevated antennas and mast kits

Electrical Specifications

Frequency Range	2-30 MHz
Nominal Impedance	300 Ω - balanced transmission line
Power Rating	400 W
Radiation Pattern	Omnidirectional (nominal)
Polarisation	Horizontal

Mechanical Specifications

Design	Broadband dipole wire antenna
Connector	2 x hook terminals
Weight	1.6 kg
Temperature Range	- 55°C to + 71°C



Kit List

Part	Item	Qty
HF centre junction and feed cable	1	1
HF dipole element on winder	2	4
Guy ring locking (AMX85)	3	1
Carrying bag	4	1
User manual	-	1



Centre junction and dipole wires
(shown with optional AMX85 support mast)



November 2021

All specifications are subject to change without notice
The information contained herein is for reference only and does not constitute a warranty of performance

Partnered Supplier



sales@eylex.com.au
www.eylex.com.au

