



DC-BLOCK-30512

DC Block, coaxial cable, 30-512 MHz, N Type, 30-512 MHz
Control Systems, Couplers and Diplexers

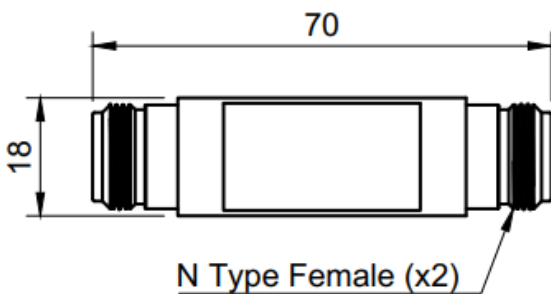

Features

- DC block for inner and outer conductor



- 30-512 MHz
- Low loss

Electrical Specifications

Frequency Range	30-512 MHz
VSWR	< 1.4:1
Nominal Impedance	50 Ω
Power Rating	50 W
In-Band Loss	- 0.4 dB
Connectors	2 x N Type female

Mechanical Specifications

Design	GRP housing
Dimensions Housing	70 x \varnothing 18 mm
Weight	0.072 kg
Temperature Range	- 55°C to + 71°C

February 2022

All specifications are subject to change without notice
The information contained herein is for reference only and does not constitute a warranty of performance

Partnered Supplier



sales@eylex.com.au
www.eylex.com.au