
APX50 Series

HF sectional vehicle whip, monopole, (tilt base), 5 m, 2-30 MHz

Tactical Antennas: Vehicle Mount



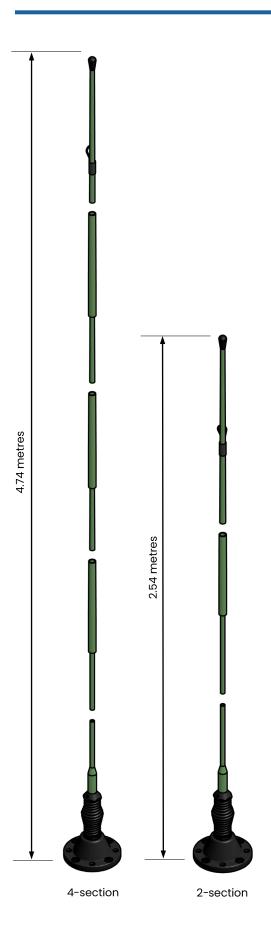

Application

The APX50 is constructed for land mobile services in the HF band 1.6–30 MHz. It consists of four mast sections and a base assembly. The base assembly is equipped with heavy duty spring coil to absorb shocks and to allow for a semi permanent deflection of the antenna when the vehicle is mobile. To reduce visual signature the antenna can also be used with only two sections.

Electrical Specifications


Frequency Range	1.6-30 MHz
Electrical Length	4.7 m
Power Rating	400 W
Radiation Diagram	Omnidirectional
Polarisation	Vertical

Mechanical Specifications

Design	End fed whip. Radiating elements completely enclosed in epoxy/fibreglass laminate. Metal parts are brass and stainless steel.
Length	2 sections: 2.54 m 4 sections: 4.74 m
Weight	4 sections: 4.5 kg
Finish	Polyurethane lacquer, olive
Temperature Range	- 55°C to + 71°C

Mounting

The base fits onto a standard NATO four-bolt pattern. An optional six hole pattern is also available.






Standard 4-hole Mounting

RF cable attachment point

Standard Kit Contents and Dimensions



Whip Lower

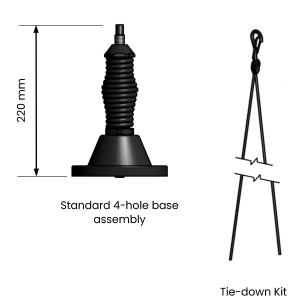


sales@eylex.com.au


Standard Kit

Description	Qty
4-hole base assembly	1
Whip Lower	1
Whip Middle	2
Whip Upper	1
Tie down kit	1

Options





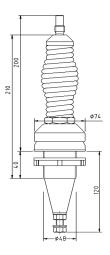

Optional 50mm base assembly

4-hole tilting base	8 mm spring base, 4-hole mounting pattern with tilting mechanism
6-hole spring base	8 mm spring base with 6-hole mounting pattern
50mm base	8 mm spring base with Ø 50 mm mounting
Mounting kit	Bolt kits used to fix the antenna to the platform. Metric and Imperial sizes available
Whip section bag	For added protection during transportation

September 2019

All specifications are subject to change without notice
The information contained herein is for reference only and does not constitute a warranty of performance



